


MERIROAD

RC-8240 DTG

For versatile crushing

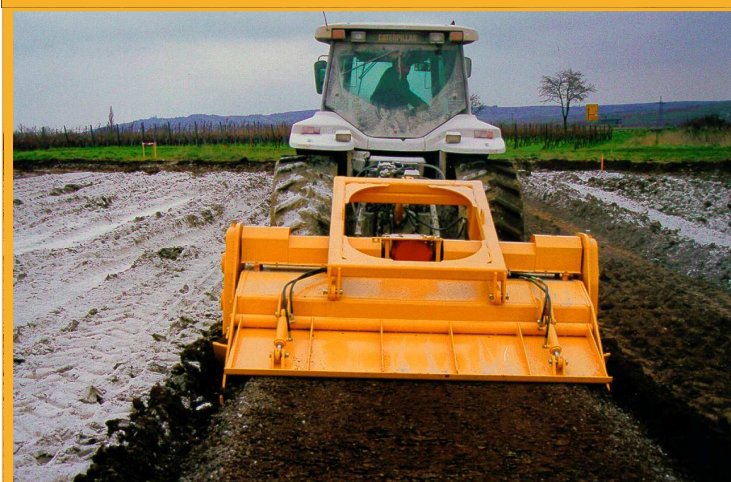

MERIROAD

MERIROAD

RC-8240 DTG

For versatile crushing

WORKING ENVIRONMENTS

- Crushing the ground before stabilizing,
- Preparing the subsoil for laying sett (car parks, roads, residential areas)
- Recycling of old cobbled and gravel roads, - Stabilization of grounds down to a depth of 30 cm on all types of roads, with easily accessible materials like cement, polimers, ash, dolomite, lime,
- Construction and redoing of forest roads, communal roads, drives to agricultural areas.
- Building outdoor feed pads

EQUIPMENT

FEATURES

- Hardox liner (frame) bolt mounted
- STB rotor with carbide cutters
- POC - Pressure operated safety clutch (SUOKONE patented)
- hydraulic guide plate front / back
- Possibility to turn the rotor

OPTIONS

- Hydraulic top link

Base machine demand

Four wheel tractor	
Mounting	KAT 3
Auxiliary hydraulic	2 pcs. 2-way
PTO	1000 rpm
Working speed	Creeper gear recommended

Technical data:

Power range	200 - 300 hp	
Transmission	Mechanical PTO	
Final transmission	Gear (G-serie)	
Clutch	POC-3	
Rotor diameter / width	800 / 2435mm	32 / 96 inch
Cutter qty.	114 (STB-Flat)	
Working depth	400 mm / 16 inch	

Main dimensions:

Length	3000 mm	118 inch
Width	2400 mm	95 inch
Height	1950 mm	77 inch
Weight, with options	4170 kg	9190 lbs

