

MERICRUSHER

MJ-2.3 STG

For versatile crushing



MERICRUSHER

MERICRUSHER

MJ-2.3 STG

For versatile crushing

MERICRUSHER WORKING ENVIRONMENTS

FOREST

- Crushing of harvesting leftovers
- Preparing of hauling lines
- Soil preparing for planting
- Maintenance of forest roads
- Clearing of vegetation and undergrowth

AGRICULTURE

- Clearing of farm land
- Reclaiming soil for farming
- Farm road maintenance
- Orchard clearing

CONSTRUCTION

- Clearing of building sites
- Crushing of stumps
- Ice crushing
- Clearing land before seeding and planting
- Clearing of power lines
- Clearing of firebreaks

EQUIPMENT

FEATURES

- Bolt mounted HDX counter blades
- Hardox liner (frame)
- UNT4 Rotor with cost effective carbide cutters
- POC - Pressure operated safety clutch (SUOKONE patented)
- Possibility to turn the rotating direction of the rotor

OPTIONS

- Push bar (hydraulic)
- Rear roller (hydraulic)
- Guide plate (front fixed)
- Hydraulic Top Link
- Multiple cutter options available

Base machine demand

Tractor

Mounting

CAT-2

Auxiliary hydraulic

2 pcs. double acting

PTO

(540) / 1000 rpm

Working speed

Creeper gear recommended

Technical data:

Power range

90-180 hp

Transmission

Mechanical PTO

Final transmission

Gear (G-serie)

Clutch

POC-2

Rotor diameter / width

400 / 2250mm

16 / 89 inch

Cutter qty.

94 + 8 (T25 Rotor)

Working depth

200 mm / 8 inch

Main dimensions:

Length

1550 mm

61 inch

Width

2590 mm

102 inch

Height

1250 mm

49 inch

Weight


1250 kg

2750 lbs

Weight, with options

1600 kg

3250 lbs

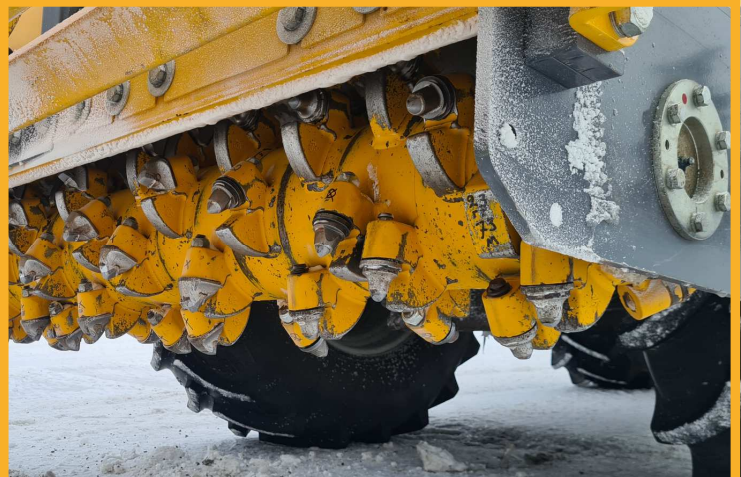

SUOKONE OY
88610 Vuokatti
FINLAND

tel. +358 86 66 2011
suokone@suokone.com
www.mericrusher.com